




# **TRESU XL20 · XL20-RD · XL20-RP**

*Coating circulator and conditioner*



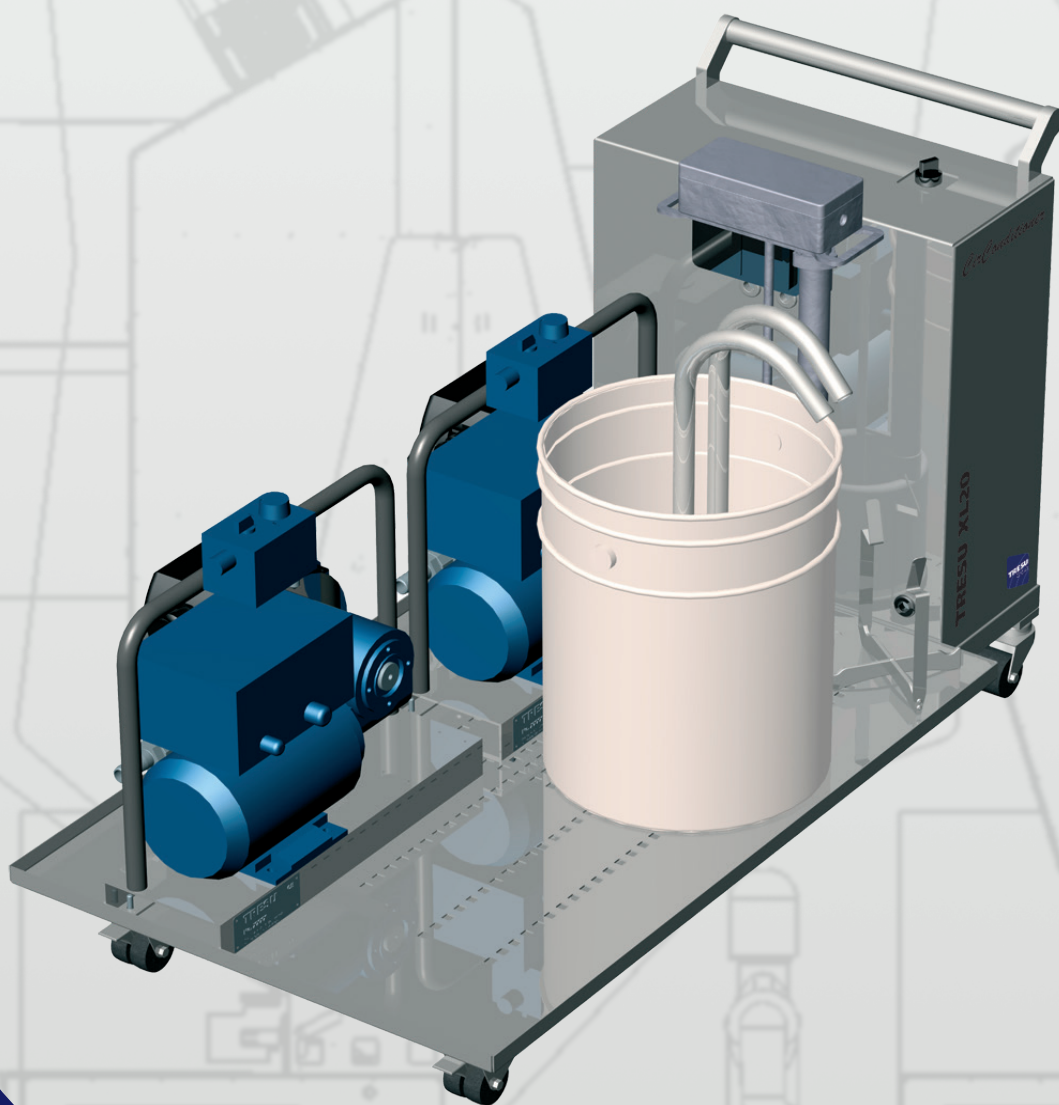


## TRESU XL20 XL20-RD · XL20-RP

Coating circulator and conditioner

**Movable circulator and conditioner for all standard-, and sensitive coatings**

- Integrated heating system for UV-coating
- Peristaltic pump for continuously adjustable and soft treated coating supply
- Optional automatic refill systems from main coating container to heated coating drum  
RP - refill by peristaltic pump  
RD - refill by diaphragm pump
- Simple and safe - sensor controlled coating circulation with pan sensor and alarm light
- Easy operation and maintenance

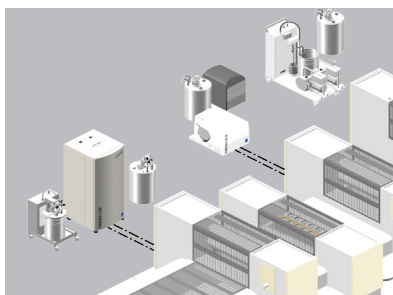

**Special coating applications for offset and flexo**

**TRESU UniPrint Combi**

**Peristaltic pump in the coating circulator**

### Technical Specifications

Height	690 mm
Width	590 mm
Depth	1100 mm
Weight	115 Kg
Voltage	200 - 230 V · 50/60 Hz
Alarm system	Standard
Pan sensor high	Standard
Sensor chamber closed	Option
Inks/coatings	Aqueous and UV



*The Best Part of Innovation*

**TRESU Group**

14-16, Eegsvej  
DK-6091 Bjert  
Tel: +45 76 32 35 00  
tresu@tresu.com  
[www.tresu.com](http://www.tresu.com)